

NEFAB EXPAK S

A lightweight, collapsible packaging system, designed to withstand the toughest transport conditions.



ExPak S
BY NEFAB

Nefab ExPak


A lightweight, collapsible packaging system, designed to withstand the toughest transport conditions. Nefab ExPak is a collapsible export packaging system made of plywood and steel. This combination offers superior performance in terms of strength, weight, and volume utilization. NEFAB ExPak has a proven track record worldwide in all industrial applications where valuable and sensitive goods require cost efficient protection and transportation.

Nefab ExPak S

ExPak S consists of six sections - bottom, lid and four loose sides. This design allows full access from all sides for loading and unloading, offering maximum flexibility in packing. The integrated locking system of tabs and slots provides logical and efficient packing and unpacking. The container can be reused several times. Optional closing devices in spring steel and plastic facilitate reusing of the container. A selection of standard sizes is available. Additionally, NEFAB ExPak-S can easily be customized according to customer specifications. If required, the container can be supplemented with inner fittings and reinforcements modified to fit the product packed.

Benefits

- Flexible sizes
- Flexible thickness of plywood
- Suitable for large containers
- Can be assembled "around" the product

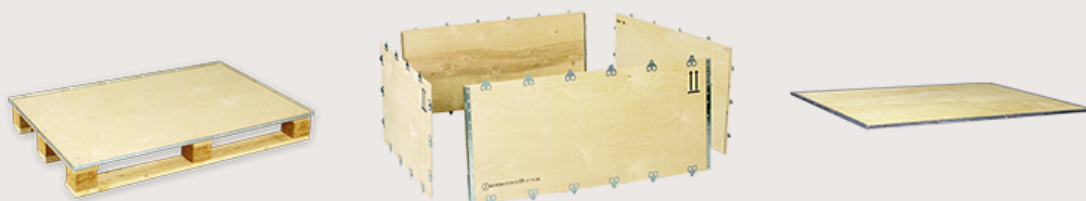

SPECIFICATIONS NEFAB EXPAK TYPE S



General data

Material specifications

Sheet material specification	Birch plywood, eucalyptus plywood or OSB
Steel specification	Galvanized, P02G Z200
Sheet material thickness, lid	6, 8 or 12 mm
Sheet material thickness, base	6, 8 or 12 mm
Sheet material thickness, frame	6, 8 or 12 mm
Steel material thickness	0.8 mm

Marking

Locking alternatives	Plastic clip, spring latch
Pallet alternatives	Wooden runners, wooden four-way pallet, integrated four-way pallet in plywood/steel
Recommended min. size, internal	400x200x100 mm
Recommended max. size, internal	6000x2900x2900 mm
Other	Dangerous goods certification

Tech performance

Max. stacking load (excl. pallet)	3500 kg/m ²
Max. net weight of goods	Dependent on pallet configuration
Test report	On request

Sample size

Box specifications: Internal dimension 1180 x 780 x 750 mm

(all specifications include pallet)	(ex: lid and base 8 mm)
Dimensions, external	1200x800x870 mm
Dimensions, internal	1180x780x750 mm
Volume, external	0.84 m ³
Volume, internal	0.69 m ³
Volume efficiency (internal/external)	0.82
Tare weight	30 kg