

# Accessories

## Stretch Film

### *Load-securing*

**Stretch films are mainly used for pallet unitisation. Nefab offers 3 types of stretch film: manual, automatic and mini.**

Nefab's stretch film is available in a range of thicknesses and its quality is measured on stretch capability, breaking resistance and puncturing resistance. The film must pass all quality checks before approved for use at Nefab.

Stretch film can be applied either manually or with a machine. The properties are different for each application. Film rolls for manual use are lighter and shorter for easier handling. For use in high volume applications machine films are the preferred choice.


Machine application:

- Thickness: 17/20/23/30/35 microns
- Stretching capability: normal (140/150 %), automatic (up to 300 %)
- Rolls of approx. 16 kgs with 500 mm width
- Pallets of 750 kg


Manual Application:

- Thickness: 17 and 20 microns
- Stretching capability: reduced to 120/130 %
- Boxes with 6 rolls of 500 mm
- Weight: 2kg; 2.2kg; 2.4kg; 2.6kg
- Colour: transparent, black or colour (when requested)
- Wider range of less demanding applications

Stretch films can have an adhesive interior and/or exterior face. Today stretch wrapping is the favoured method of pallet unitisation.

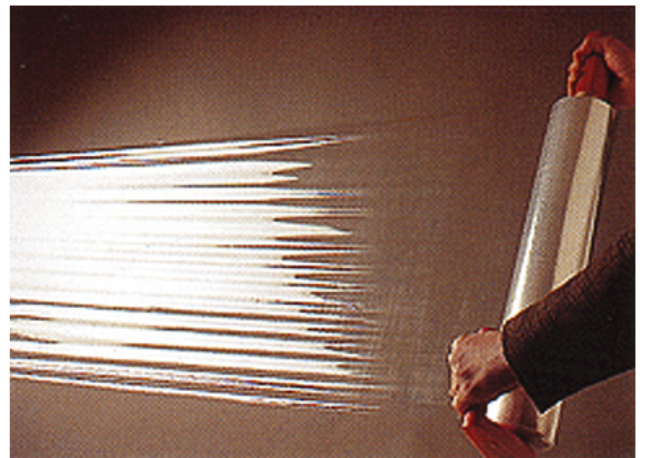

Stretch film also protects goods from dirt and dust.

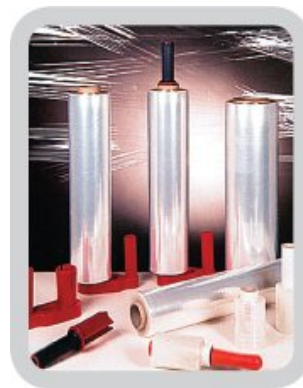

Films have different characteristics for different applications.



Stretch film application with a machine.

#### NEFAB PACKAGING UK LTD

151 Silbury Boulevard, Milton Keynes,  
MK9 1LH, United Kingdom  
Tel:+44-(0)1908-424300,Fax:+44-(0)1908-424 301  
Registered in London No. 4335687  
info@nefab.co.uk • www.nefab.co.uk

# NEFAB