


### SAFETY INSTRUCTIONS



Four people needed  
Safety shoes needed  
No tools needed

### SAFETY INSTRUCTIONS

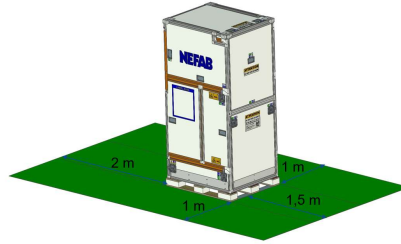


Needed space:  
1.5 m in front  
2.0 m behind  
1.0 m on both sides

### SAFETY INSTRUCTIONS




Fully fold back opened latches

### SAFETY INSTRUCTIONS

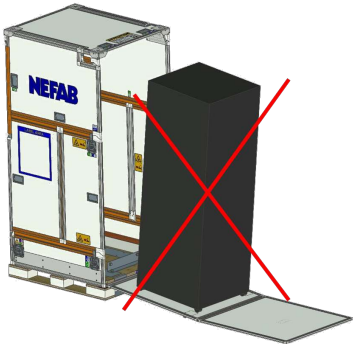

Never use front door as ramp!

### SAFETY INSTRUCTIONS

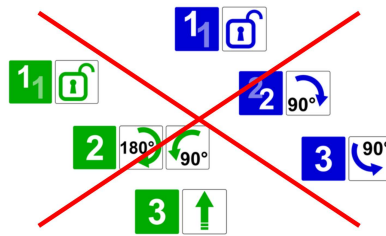


For removing and placing the hood, disregard labels.

### HOOD REMOVAL STEP 1




Remove front door and put it aside.  
For details, see Folding instructions.

### HOOD REMOVAL STEP 2

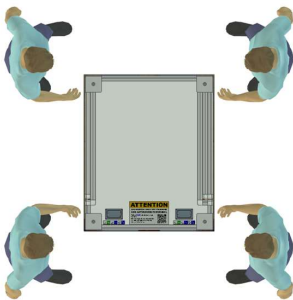

Stand at four corners of base

### HOOD REMOVAL STEP 3

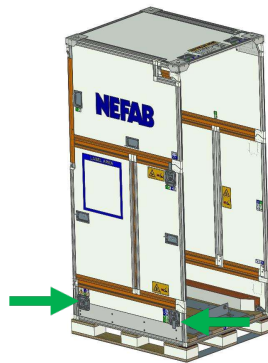


Open all four *lower* latches

### HOOD REMOVAL STEP 4



Carefully lift hood upwards  
using four lower handles

### HOOD REMOVAL STEP 5

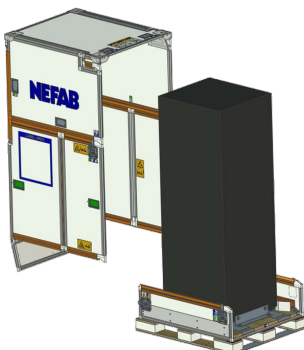

Slowly move hood behind base


### HOOD REMOVAL STEP 6




Fold the rear flap underneath  
the hood and lower onto floor.




Do not transport the hood when  
removed from base

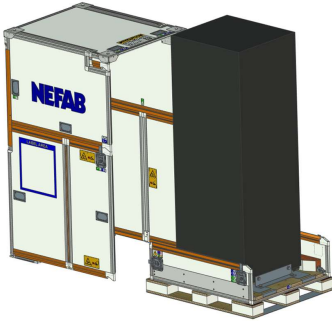**HOOD PLACEMENT STEP 1**


Place base (with or without product on it) in front of hood

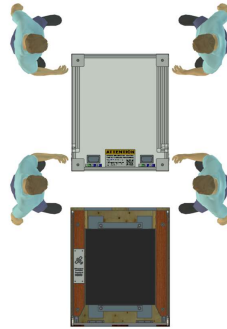**HOOD PLACEMENT STEP 2**


Stand at four corners of hood

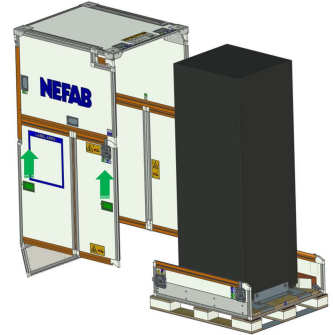**HOOD PLACEMENT STEP 3**

Using four lower handles, carefully lift hood

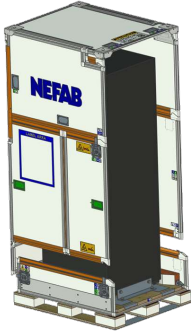**HOOD PLACEMENT STEP 4**

Position hood right above base

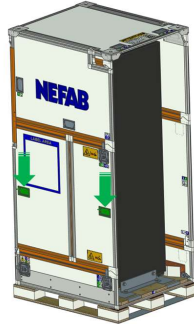**HOOD PLACEMENT STEP 5**

Lower hood down onto profiles in base.



Ensure that profiles grab into each other over full length, and that front corners align.

**HOOD PLACEMENT STEP 6**

Close all four lower latches

**HOOD PLACEMENT STEP 7**

Place the front door.  
For details, see Setup instructions.