



VERSION 2020-06-16

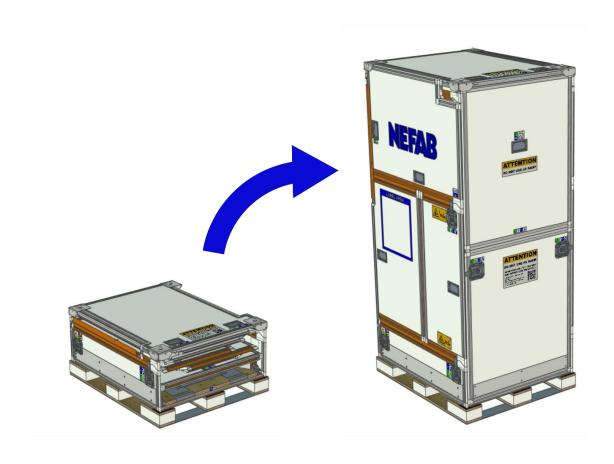

NEFAB

REQUIRED PEOPLE AND EQUIPMENT

- This job requires two people
- Use steel-toe safety boots
- No tools needed








REQUIRED SPACE


- 1.5 meter in front of product
- 2.0 meter behind product
- 1.0 meter on either side of product

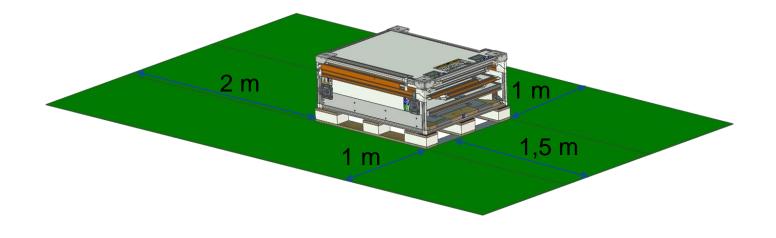

NEFAB

REQUIRED SPACE


3.0 meter ceiling height

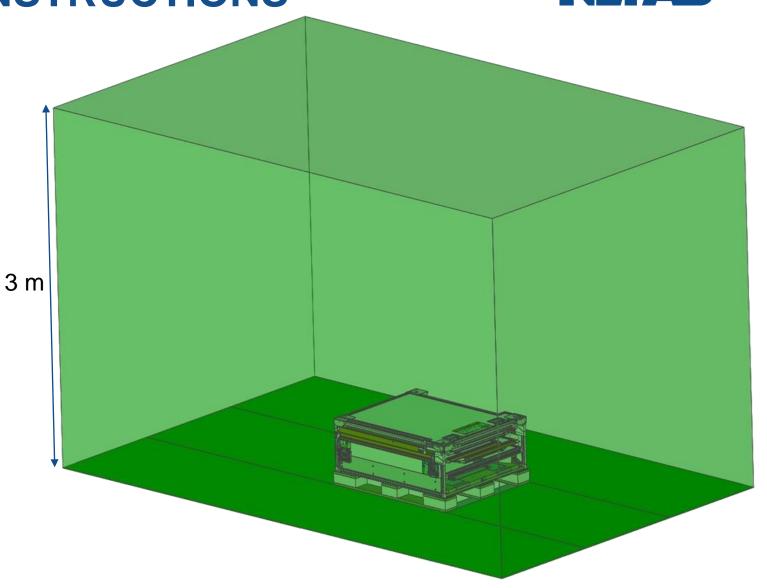



SAFETY WARNINGS

 Use handles where provided to set up product

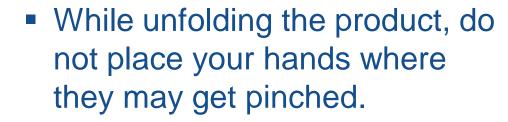









NEFAB


SAFETY WARNINGS

 When opening latches, make sure to fold back the arm and buckle completely.












SAFETY WARNINGS

 Under no cirumstances use the front door as a ramp.

The contents of the crate must be unloaded using a stand-alone wood ramp, or Nefab's Rack Jack mobile hydraulical lifting platform.



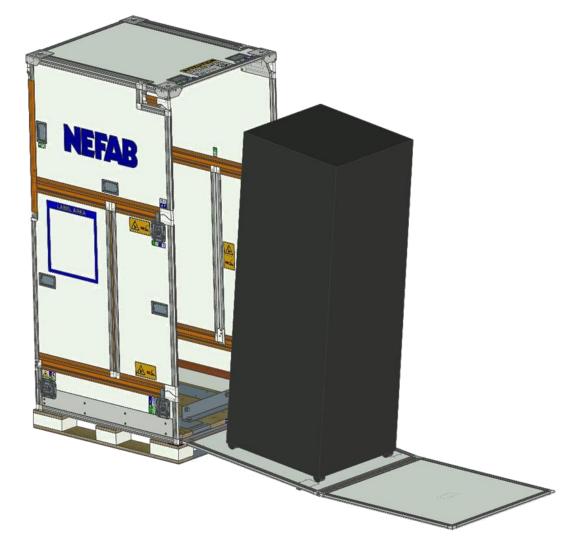



SAFETY WARNINGS

In order to set up the product, follow the following steps.


These are marked with **BLUE** numbered labels on the product.








Double digit labels mean that you should do an action twice, on both sides of the product.

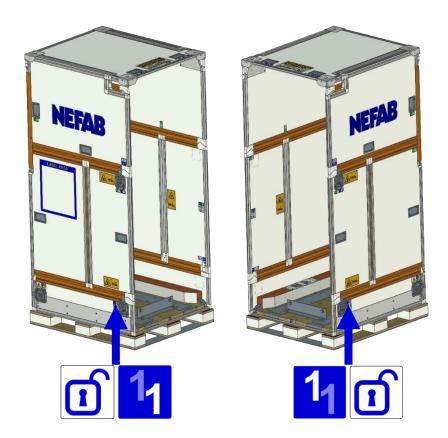






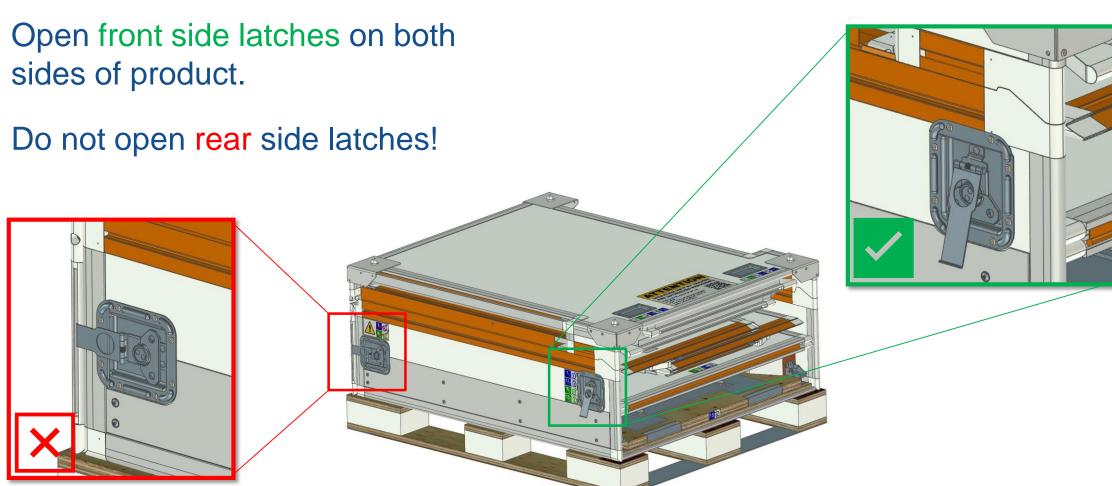






Open to an angle of 90°.

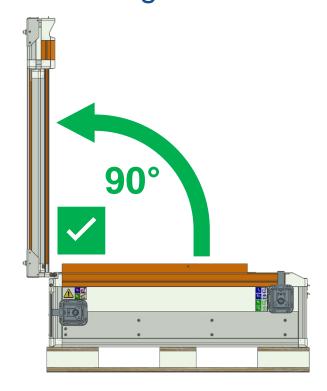


Do not open more than 90°!

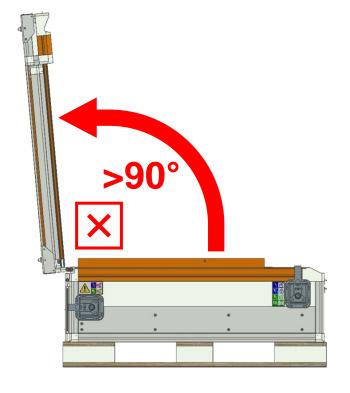





Open the first panel by pulling the handle provided.

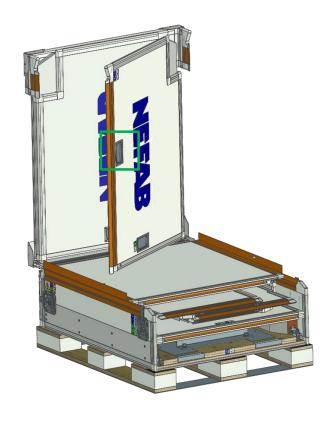

Open 90° until the panel hits the side









Close the slide latch, so it clicks in place around the locking pin.













Open the second panel by pulling the handle provided.



Open 90° until the panel hits the side









Lock the panel in place just like on the other side.















Rotate until the front corners of the top section touch the floor behind the product Then let the top section slide backwards until it sits flat on the floor

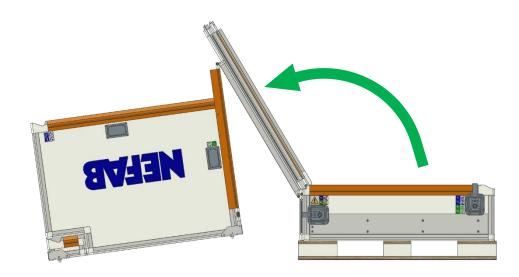


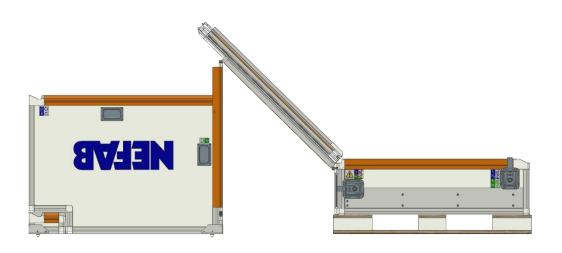






Open up the first folded side panel 180° and keep in place

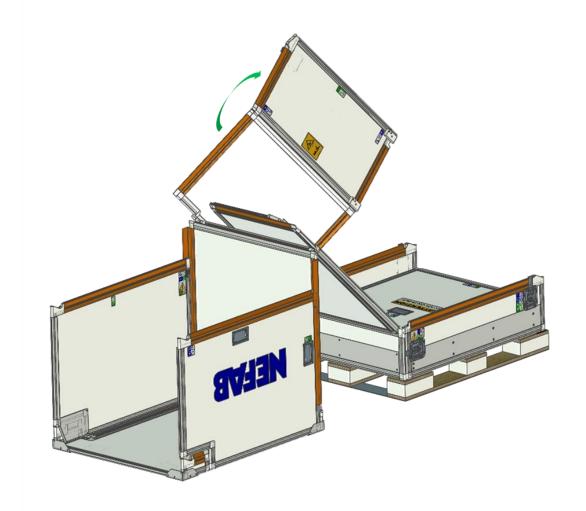






Open up the second folded side panel 180° and keep in place

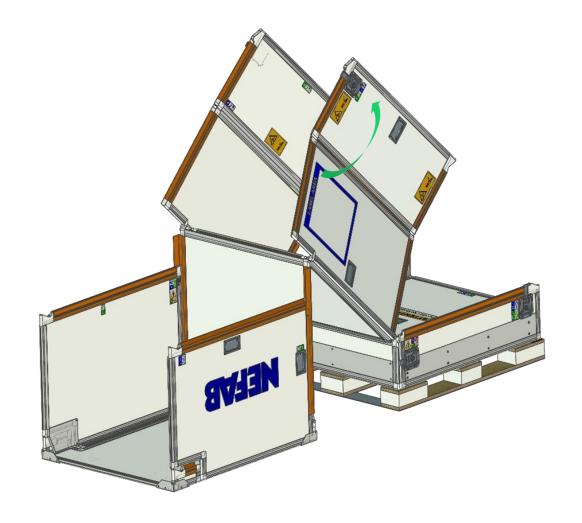






Rotate the opened panels downwards so they land in the corresponding base profile.

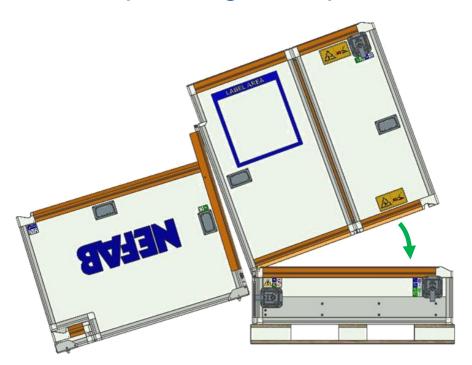



Warning:

Make sure that the profiles fit correctly into each other. Pay special attention to indicated areas.

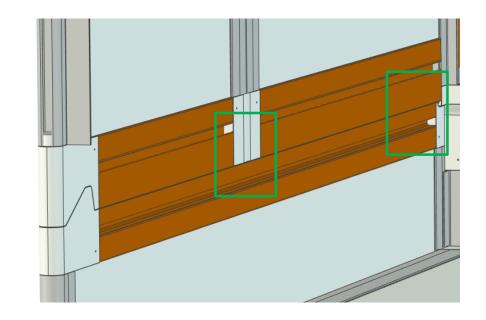






Make sure that the front edges of the panels line up.

Then, lock the panels in place by closing the latches.

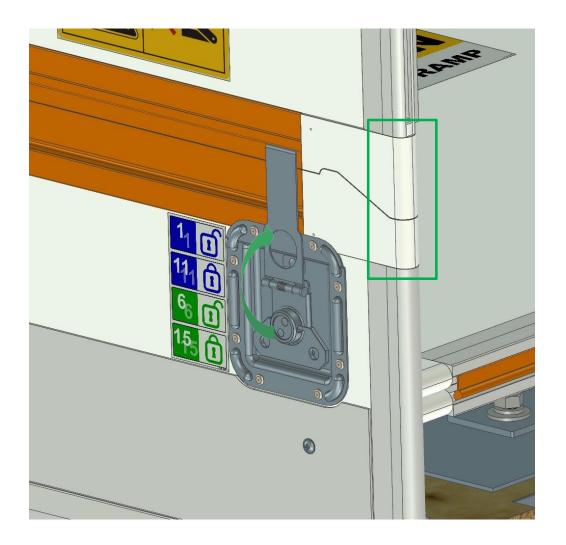






Keep rotating upwards.


For the second half of the rotation, it is ok to grab the vertical edges.

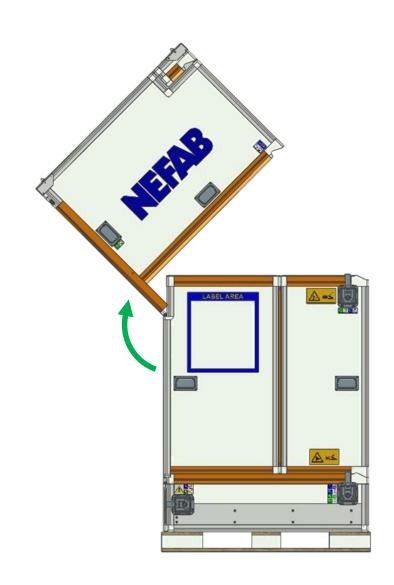






Make sure that the front edges of the panels line up. Then, lock the panels in place by closing the latches.

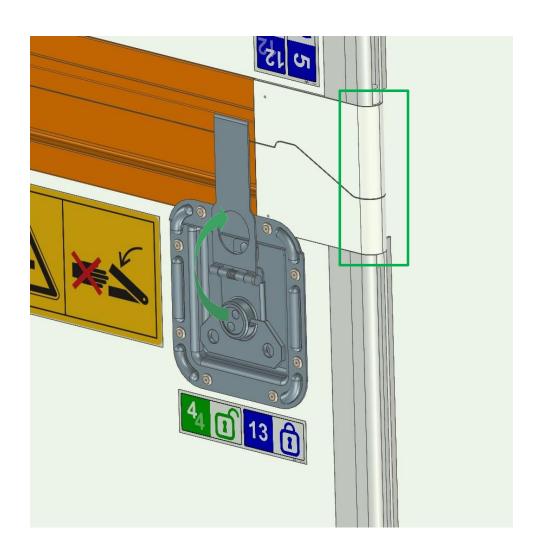






Grab the folded front door by the front edge, and pull out of the product base

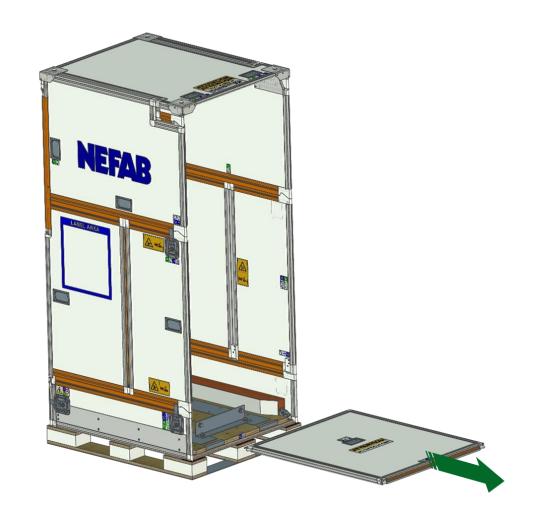





Hook the folded front panel into the metal profile at the front edge of the base.

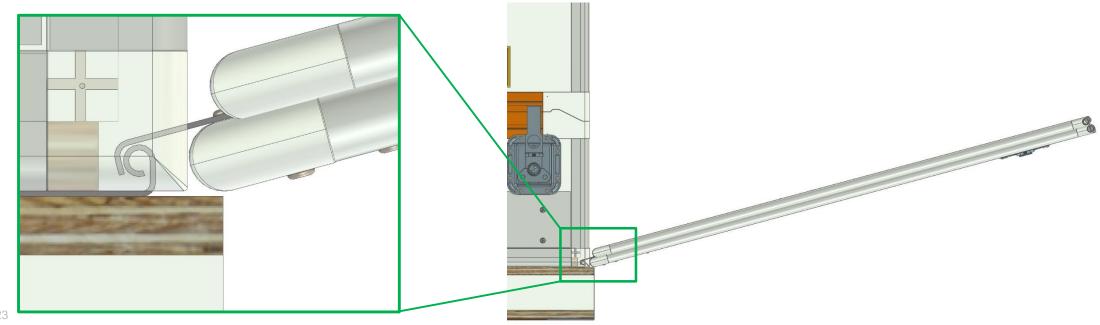






Using the handle, raise the front

door.



Slide the top corners behind the metal flanges in the upper corners.

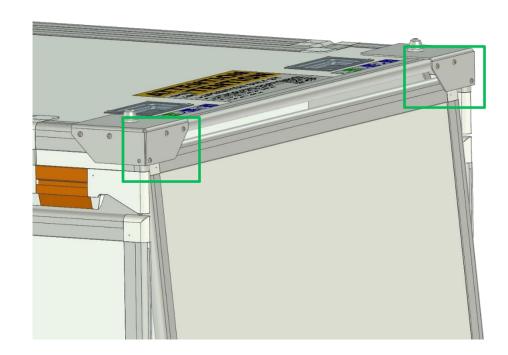





Close both latches to secure the front door.

Finished.

